

# Embedded System

## LIGHT Series




**Application :**  
Thin Client, Network device, Set-Top Box, VPN, VOIP and POS system

**Technical Data :**

|                   |                                     |
|-------------------|-------------------------------------|
| • Dimension       | 48.5 H x 234 W x 175 D mm           |
| • Material        | Aluminum + Plastic ( Silver Cover ) |
| • Color           | Blue / Silver                       |
| • Weight          | 1 Kgs ( Incl. M/B )                 |
| • Storage Space   | 1 x 2.5" HDD                        |
| • LED Light       | Power / Network / HDD               |
| • Front Connector | 1 x USB, Mic-in, Lin-out            |

**Dimension**

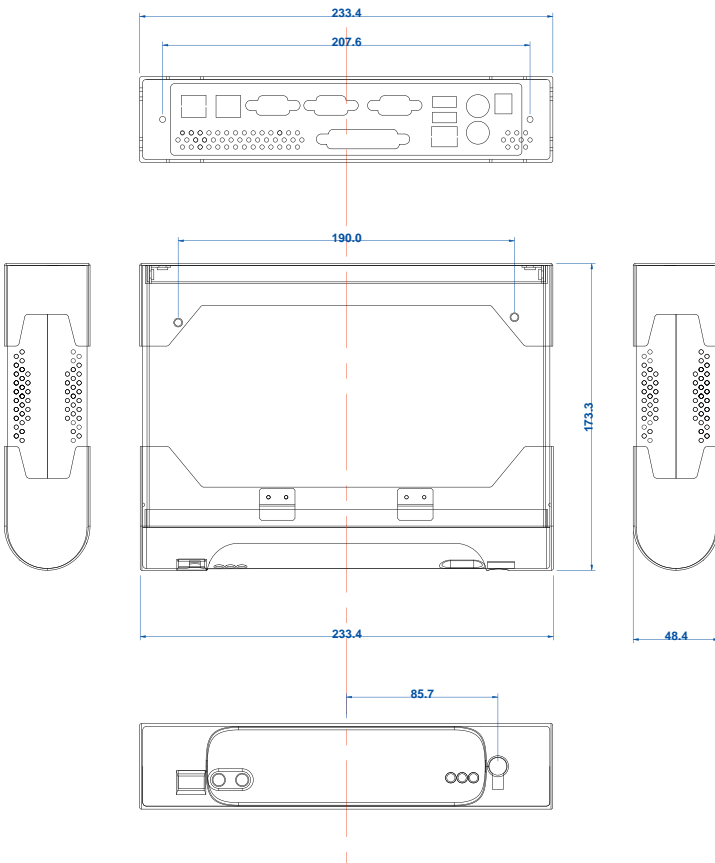

**LIGHT Chassis without top-cover**



M/B information: ( Please refer to M/B specification )



| M/B Model | Description                                  |
|-----------|--|
| CV700A    | 3 LAN  |
| CV700C    | 4 COM Ports                                  |
| CV763A    | 2 PCMCIA Slot / 4 LAN                        |
| MV700A    | Twin-view / Video-in                         |
| CI852A    | 4 LAN  |
| CI852C    | 4 COM ports                                  |
| SI852A    | 4-16 Video-in                                |
| MI853AW   | 2 IEEE1394 / DVI / TV-Out / Wide range DC-IN |

**Optional Module**

|               |  |
|---------------|--|
| Wireless Lan  | Chip: RALINK/VIA , MINI PCI Interface , 802.11g Standard ,<br>Driver: Win98,ME,2K,XP,Linux, 128bit WEP Encryption Support    |
| 56K Modem(CX) | Chip: Conexant , USB Interface , Driver: Win98,ME,2K,XP,Linux  |
| ISDN          | Chip: Cologne, ISDN Standard ETSI Euro ISDN,<br>Driver: Win98,ME,2K,XP,Linux   |
| ADSL          | Chip: Conexant , ANSI T1.413 Issue 2,<br>ITU-T G.992( G.dmt ) and G.992.2(G.lite) Annex A,B.<br>Driver: Win98,ME,2K,XP,Linux |

**Optional Accessory :**

- Wall mount kit

