



### Main Features

- ♦ On-board Intel® Atom™ N270 Processor, 1.6GHz
- ♦ Intel® 945GSE chipsets
- ♦ Dual 1000/100/10 Mbps LAN ports
- ♦ 4 x USB2.0/VGA/Parallel port
- ♦ 2 x RS232 and 2 x RS232/422/485
- ♦ On-board DC to DC power design to support 16V to 30V DC input
- ♦ Support ATX power mode and PXE/ WOL
- ♦ One Mini-PCIe Socket
- ♦ Two PCI Expansion Slot

### Product Overview

NISE 2020, with Intel® Atom™ N270 1.6GHz CPU on board, provides robust performance-per-watt which is the best for cost effective embedded solution. An energy-efficient solution in a compact system, NISE 2020 offers great flexibility to communicate with client devices accommodated various power supply requirements in dynamic vertical markets, range from 16 ~ 30V DC input. Coupled with its four serial ports (two support RS422/485 with auto-flow control feature), dual 10/100/1000 LAN ports, four USB ports, one printer port and one external CF socket, the NISE 2020 is also equipped with two PCI slot and one mini-PCIe Socket for optional expansion needs.

Benefits from less than 25 watts power consumption, NISE 2020 is an ideal model for embedded vertical markets, such as industrial automation, machinery control, message board controller, VoIP, low power-budget devices, and self-service system.

### Specifications

#### Main Board

- ♦ NISB2000
- ♦ On-board Intel® Atom™ N270 processor, 1.6GHz, 533MHz FSB

#### Chipset

- ♦ Intel® 945GSE
- ♦ Intel® ICH7M

#### Main Memory

- ♦ 1 x DDR2 SO-DIMM sockets, single channel, support up to 2GB DDR2 400/533 SDRAM, unbuffered, non-ECC

#### Expansion

- ♦ Supports two 32-bit/33MHz PCI card (Max. 10W power consumption/slot)
- ♦ PCI Length support: Max. 176mm
- ♦ One Mini-PCIe socket

#### I/O Interface-Front

- ♦ ATX Power on/off switch
- ♦ HDD Access/Power status LEDs
- ♦ 2 x USB2.0 ports
- ♦ 4 x Serial port (COM3 & COM4 screw terminal support RS232/422/485)

#### I/O Interface-Rear

- ♦ 16 ~ 30V DC input
- ♦ 1 x PS/2 Keyboard/Mouse
- ♦ 1 x DB15 VGA connector
- ♦ 2 x Gbe LAN ports
- ♦ 1 x Speaker out
- ♦ 2 x USB2.0 ports
- ♦ One antenna hole for optional Mini-PCIe WiFi module

#### Storage

- ♦ 1 x 2.5" SATA HDD drive bay
- ♦ One external CF socket
- ♦ Support one optional USB DOM (2.54mm, Horizontal type)


#### Power Requirements

- ♦ ATX Power mode
- ♦ DC to DC power on-board to support 16V to 30VDC
- ♦ Optional 19V 65W or 120W AC/DC Power adapter

#### Dimensions

- ♦ 195 mm (W) x 200 mm (D) x 108 mm (H)

## Dimension Drawing

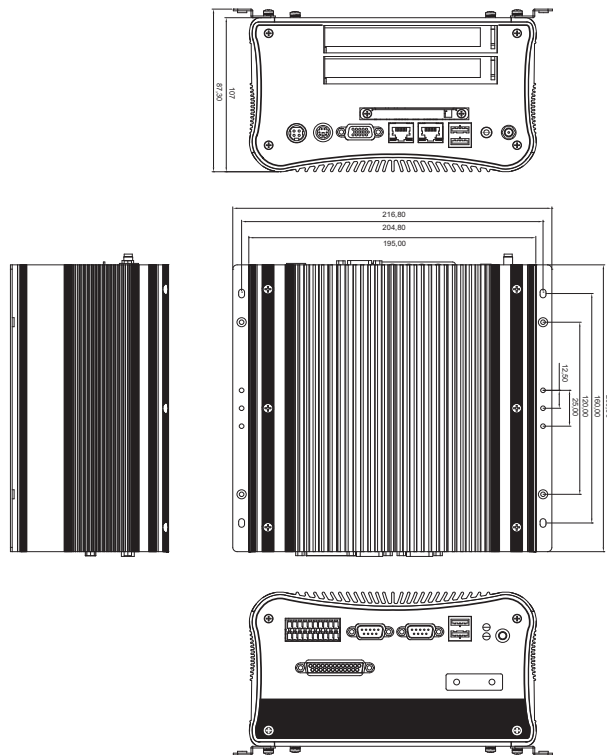

### Construction

- Aluminum Chassis with fan-less design

### Environment

- Operating temperature:  
Ambient with air flow: -5°C to 55°C  
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 10% to 93% (Non-Condensing)

### Certifications

- CE approval
- FCC

## Ordering Information

- **Barebone**  
**NISE 2020 (P/N:10J00202000X0)**  
Intel® Atom™ N270 Fan-less Bare-Bone System, with two PCI Expansion Slot
- **AC/DC Power adapter (P/N:7400065006X00)**  
19V, 65W (Optional)
- **AC/DC Power adapter (P/N:7410120002X00)**  
19V, 120W (Optional)