


# Embedded System

## NEO Series



NEO Chassis without top-cover

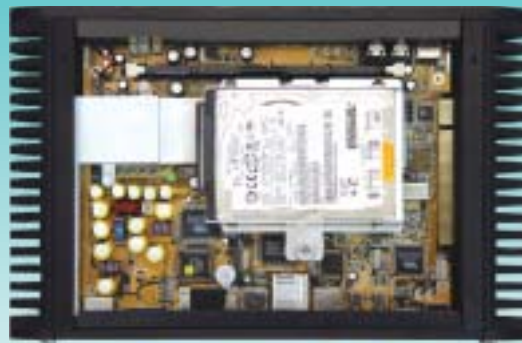

**Application :**  
Thin Client, Network device, Set-Top Box, VPN, VOIP, DVR and POS system

**Technical Data :**

|                 |                         |
|-----------------|-------------------------|
| • Dimension     | 50 H x 275 W x 172 D mm |
| • Material      | Aluminum                |
| • Color         | Black                   |
| • Weight        | 2 Kgs ( Incl. M/B )     |
| • Storage Space | 1 x 2.5" HDD            |

**Optional Accessory :**

- Wall mount kit

Wall mount kit





M/B information: ( Please refer to M/B specification )

| M/B Model     | Description  |
|---------------|--|
| CI945A/CI963A | Core 2 Duo solution / 4 LAN / Mini PCI / PCMCIA / SATA |
| MI945A        | DVI / Video-in / TV-OUT                                |
| CI945C        | 4 COM ports  |
| SI945A        | 4-16 ports Video-in                                    |
| CV700A        | 3 LAN  |
| CV700C        | 4 COM Ports  |
| CV763A        | 2 PCMCIA Slot / 4 LAN                                  |
| MV700A        | Twin-view / Video-in                                   |
| CI852A        | 4 LAN  |
| CI852C        | 4 COM ports  |
| SI852A        | 4-16 Video-in  |
| MI853AW       | 2 IEEE1394 / DVI / TV-Out / Wide range DC-IN           |

**Optional Module**

|               |  |
|---------------|--|
| Wireless Lan  | Chip: RALINK/VIA , MINI PCI Interface , 802.11g Standard ,<br>Driver: Win98,ME,2K,XP,Linux, 128bit WEP Encryption Support    |
| 56K Modem(CX) | Chip: Conexant , USB Interface , Driver: Win98,ME,2K,XP,Linux  |
| ISDN          | Chip: Cologne, ISDN Standard ETSI Euro ISDN,<br>Driver: Win98,ME,2K,XP,Linux   |
| ADSL          | Chip: Conexant , ANSI T1.413 Issue 2,<br>ITU-T G.992( G.dmt ) and G.992.2(G.lite) Annex A,B.<br>Driver: Win98,ME,2K,XP,Linux |

**Dimension**

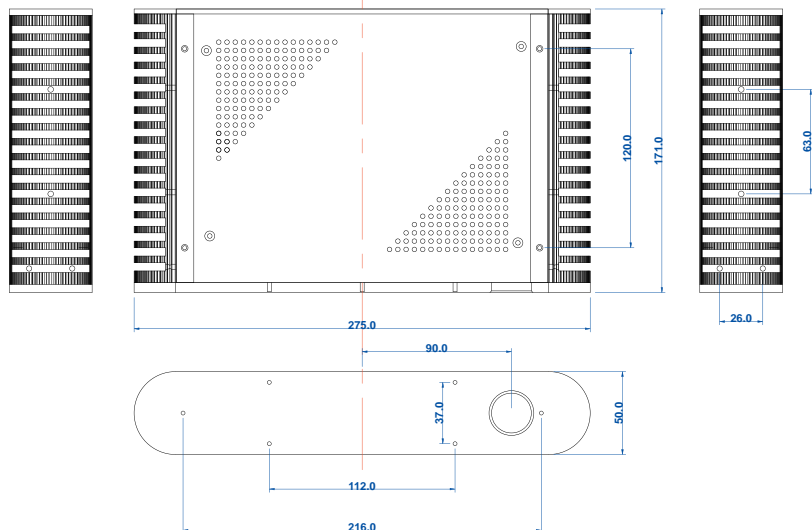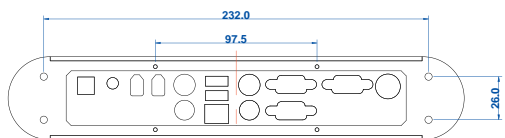

Wireless Lan

Networking  
POS / Automation  
DVR  
Multimedia  
Embedded System