

TDM-P185WH5TAGF-RND2

18.5" Defense Monitor, 1500 nits, IP65 Aluminum Front Bezel, Mosmite Film, AG, VGA/DP/HDMI, 9~36VDC, MIL-STD-461G/1275E Compliance



Features

- ▶ 18.5" 1920*1080 FHD LCD and P-cap Touch
- ▶ IP65 and Rackmount Shape Front Bezel
- ▶ 1500 nits LED backlight
- ▶ Mosmite Film with AR feature
- ▶ Anti-Glare
- ▶ HDMI by Metal Circular Connector
- ▶ USB fo Touch by Metal Circular Connector
- ▶ DC Power Input by MS3114E8 Circular Connector
- ▶ DC 24V Power Input with 90W power adapter
- ▶ -40~70°C Operating Temperature

I/O Connect

External I/O Port	HDMI by Metal Circular Connector (with 1.5 meter external cable) USB(for Touch) by Metal Circular Connector (with 1.5 meter external cable) Power Input by MS3114E8 Connector
-------------------	---

LCD

Max. Resolution	1920 x 1080
Contrast Ratio	1000 : 1
Max. Color	16.7M
Luminance	1500 nits
View Angle	89/89/89/89

Power Requirement

Power Input	24VDC Power Input by MS3114E8 Connector
-------------	---

Touch Screen

Type	P-cap USB
------	-----------

Environment


Operating Temp	-40~70 °C , IEC-60068-2-1/2/14
Storage Temp	-40~70 °C
Humidity	10~90% @40 °C, non-condensing
EMC	MIL-STD-1275E Compliance MIL-STD-461G Compliance For CE101/102, RE101/102 FCC / CE Class A Certification
Vibration	MIL-STD-810H, Method 514.8, Procedure I, 5~500Hz Certification
Shock	MIL-STD-810H, Method 516.8, Procedure I, 20g 11ms Certification

Mechanical

Construction	Aluminum Bezel and Metal case
IP Rating	IP65 Front Side
Mounting	Wall Mount , VESA Mount
Dimension	TBC

* All specifications are subject to change without prior notice.

Dimension & I/O Connector

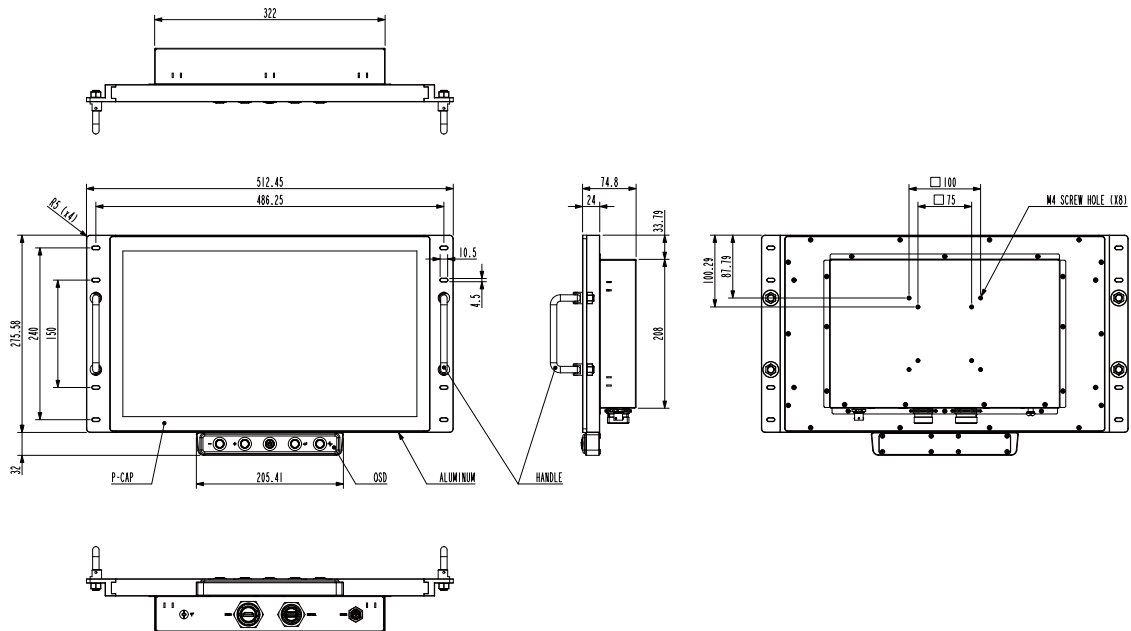

Ordering Information

TDM-P185WH5TAGF-RND2	18.5" Defense Monitor, 1500 nits, IP65 Aluminum Front Bezel, Mosmite Film, AG, VGA/DP/HDMI, 9~36VDC, MIL-STD-461G/1275E Compliance
----------------------	--